

***ANSI/UL ARCHITECTURAL
HARDWARE***




COORDINATOR

ITEM CODE: DS1707 SERIES, DCB, DFB1858, DFB5200, DB78214 and DB214

FEATURES: DS1707 series

- Surface mounted coordinator.
- Material: Aluminum.
- Base: 1 5/8 x 5/8 inch (41 x 16 mm).
- Maximum astragal overlap: 1 inch (25.4 mm).
- Designed for use on pairs of doors when one door needs to close before the other.
- Function: active door lever, located nearest to the active stop, holds the active door open until the trigger mechanism is released by the closing of the inactive leaf.
- Coordinator might not span the entire width of door, filler bars DFB1858 or DFB5200 is needed to full up the extra space.
- Optional mounting brackets DB78214 and DB214.
- Four lengths are available:
 - 60 inches (1524 mm) for door range 97-112 inches (2463.8 - 2844.8 mm).
 - 52 inches (1320.8 mm) for door range 54-96 inches (1371.6 - 2438.4).
 - 42 inches (1066.8 mm) for door range 44-53 inches (1117.6 - 1346.2 mm).
 - 32 inches (812.8 mm) for door range 34-43 inches (863.6 - 1092.2 mm).
- Non-handed.
- Complete with fixing screws.
- UL listed. UL file number: GVVR.R39267
- Do not use spring hinges with coordinating device.
- Standard finish: US28 (Satin Aluminum, clear anodized).
- Optional finish: US19 (Flat black coated).

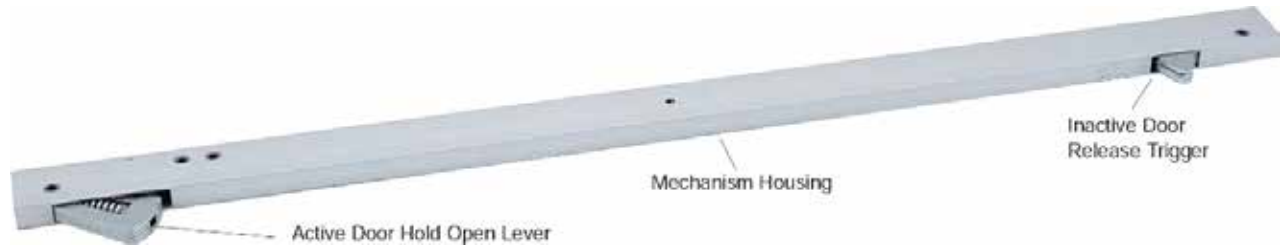

FEATURES: DCB

- Carry-open bar.
- Material: Steel.
- Used when it is possible for the inactive door to be opened before the active door.
- Use in conjunction with DS1707 series.
- Non-handed.
- Complete with fixing screws.
- Not required when the inactive door is equipped with automatic or constant-latching flush bolts.
- Plate: 1-3/4 x 2-1/4 inches (45 x 57 mm).
- Projection: 25/32 inch (20 mm).
- Standard finish: US28 (Aluminum painted)
- Optional finish US19 (Flat black booted).



ITEM CODE: DS1808 & DS1909

FEATURES:

- Surface mounted gravity action coordinator, pull side.
- UL Listed. GVVR.R39267
- Material: Forged Brass
- Designed for use on pairs of doors when inactive leaf needs to close before the active leaf. Designed for doors with or without astragal.
- DS1808 (7 inches projection), DS1909 (9 inches projection).
- Gravity action arm and door bracket are adjustable at site for ease of installation.
- Rubber roller provides quiet operation.
- Durable carry bar (DCB) is needed when installing an astragal. The carry bar will keep the astragal from damage when the inactive leaf is opened first.
- Non-handed.
- DS1808: Use on pairs of doors with astragal on active door up to 1219.2 mm, or with astragal on inactive up to 1016 mm or with astragal on both doors up to 863.6 mm.
- DS1809: Use on pairs of doors with astragal on active door over 1219.2 mm, or with astragal on inactive over 1016 mm or with astragal on both doors over 863.6 mm.
- Complete with fixing screws.
- Do not use spring hinges with coordinating device.
- Standard finish: US28 (Satin Aluminum, clear anodized).
- Optional finish: Upon request.

