

***CE/EN ARCHITECTURAL  
IRONMONGERY***

---



**GRADE 4 LEVER HANDLES**

**ITEM CODE: HXXXXX-EN4L SERIES  
GRADE 4 STAINLESS STEEL LEVER HANDLE**

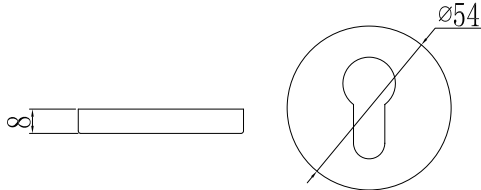
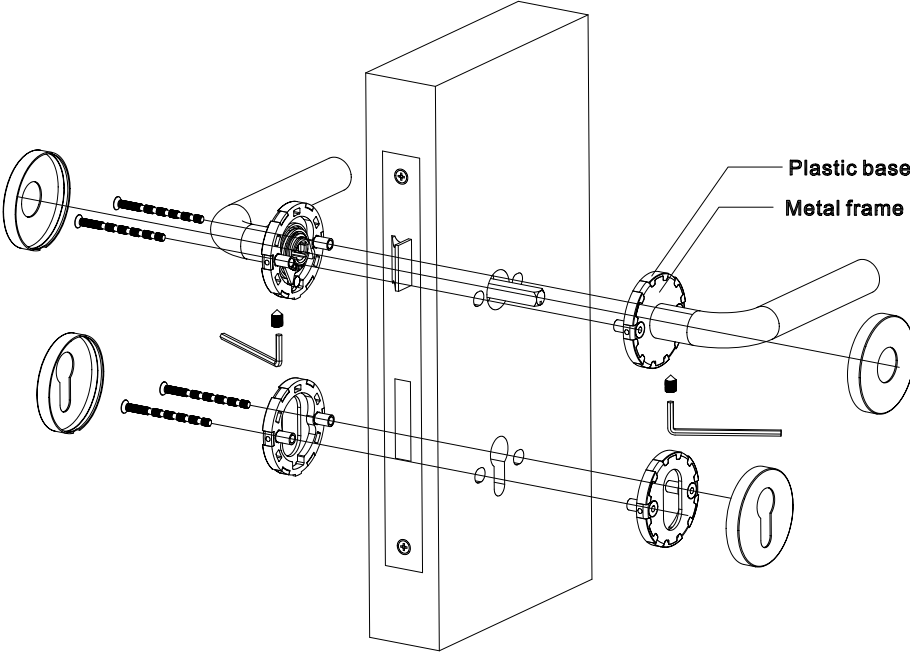
**EN1634-1** 

4



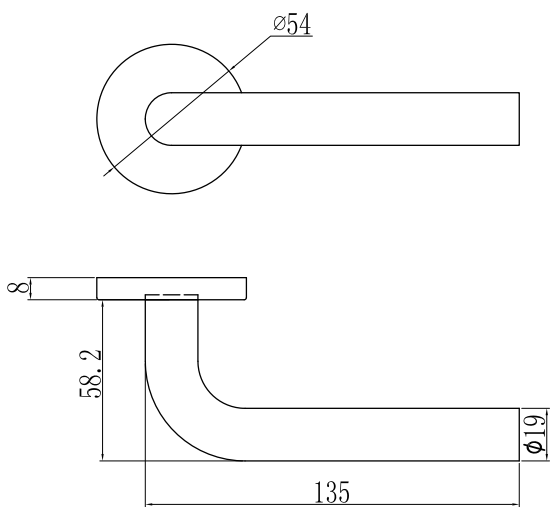
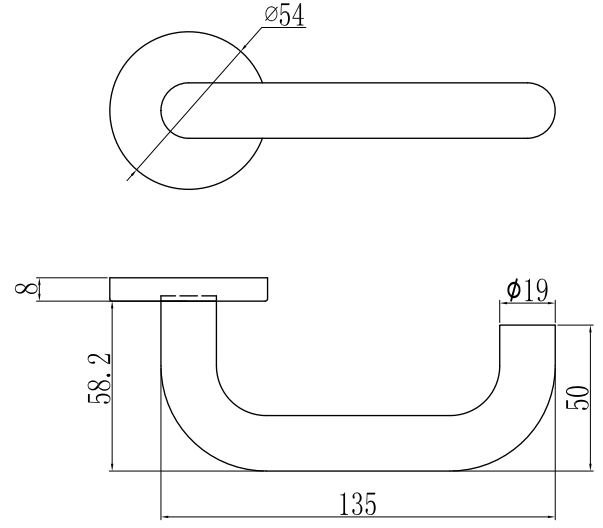


Features:

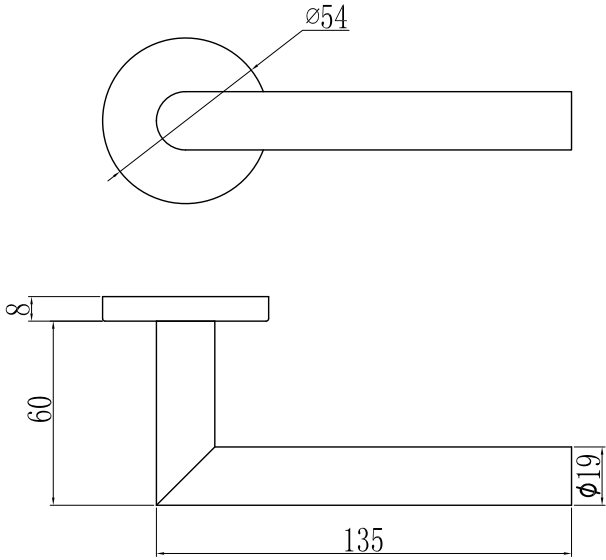
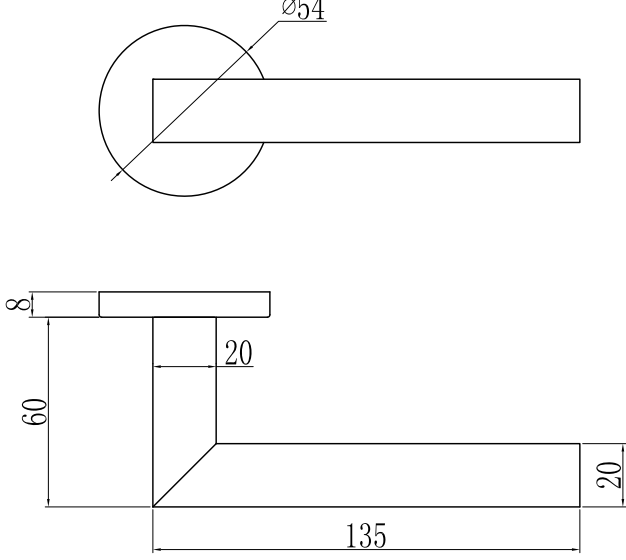


- Description: Solid or hollow Stainless steel lever handle set on round lever rose with Europrofile escutcheon. Fully return spring assisted, concealed fixing (escutcheon baseplate & lever rose).
- Material: Standard in stainless steel EN 1.4301 (type SUS304), optional in stainless steel EN 1.4401 (type SUS316).
- Tested and certified to BS EN 1634-1: 2014+A1:2018 and BS EN 1906:2012.
- Standard finish: satin stainless steel (SSS). Other finishes are available upon request

<b>LEVER HANDLE</b>	
<p>1 pair of stainless steel solid or hollow lever handle. 1 pair of stainless steel lever rose dia. 54 x 8 mm on plastic escutcheon baseplate.</p>	<p>1 pair of bolt through. 1 piece of square solid spindle 110 x 8 mm. 1 piece of Allen key 1 pair grub screws</p>
<p><b>STANDARD ESCUTCHEONS</b></p> <p>1 pair of stainless steel Europrofile cylinder rose dia 54 x 8 mm. 1 pair of plastic rose baseplate. 1 pair of bolt through. Available in round shape.</p>	
	

CLASSIFICATION:

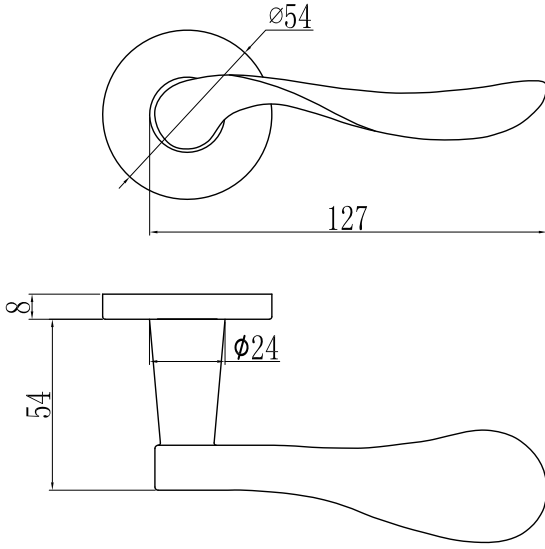
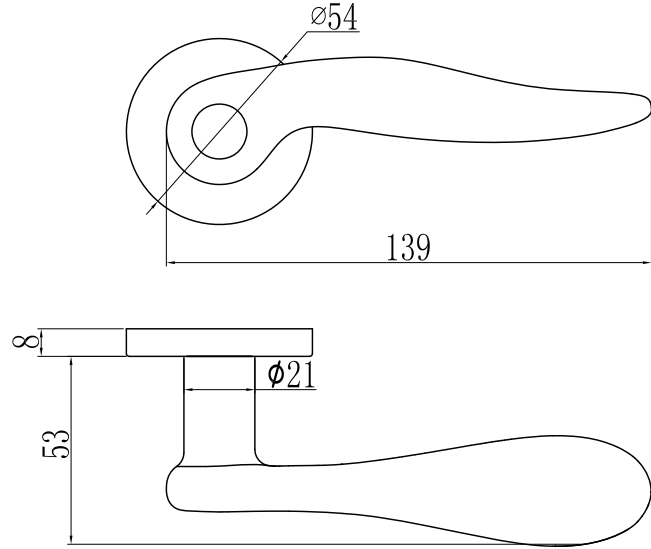


CATEGORY OF USE	DURABILITY	TEST DOOR MASS	FIRE RESISTANCE	SAFETY	CORROSION RESISTANCE	SECURITY	TYPE OF OPERATION
<b>4</b>	<b>7</b>	<b>-</b>	<b>B</b>	<b>1</b>	<b>4</b>	<b>0</b>	<b>B</b>

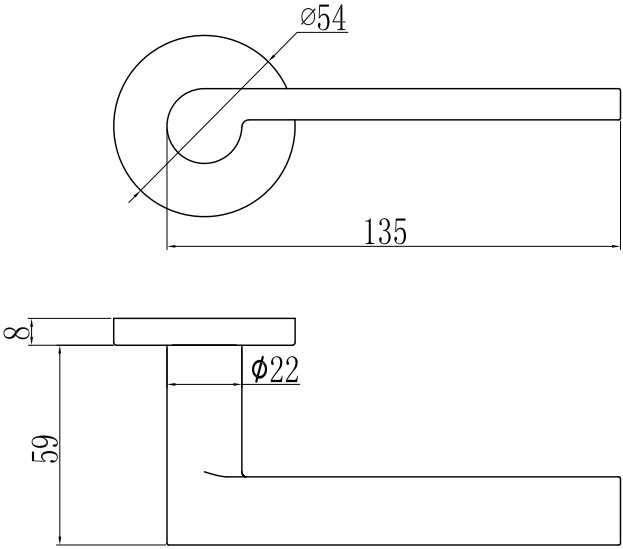
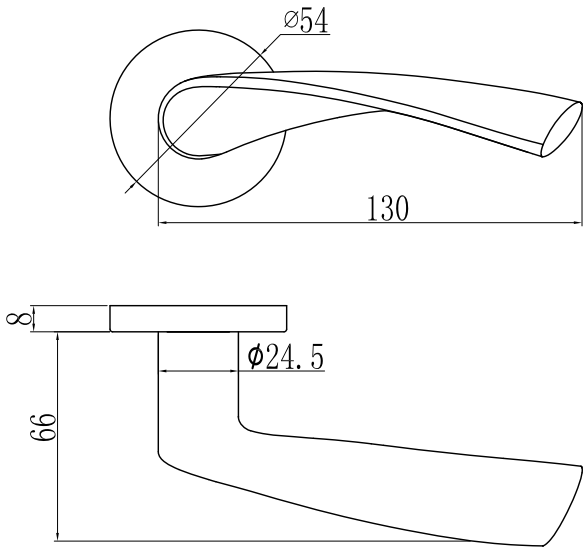


HOLLOW - H02B01-EN4L	HOLLOW - H01B01-EN4L
	
	

HOLLOW – HL2B01-EN4L	HOLLOW – HL2B01-EN4L-20
	
	

SOLID – HT3008-EN4L	SOLID – HS3064-EN4L
<p>Technical drawing of the HT3008-EN4L lever handle. The top view shows a circular hole with a diameter of <math>\varnothing 54</math> and a total length of 135. The side view shows a thickness of 8 and a mounting height of 45.</p>	<p>Technical drawing of the HS3064-EN4L lever handle. The top view shows a circular hole with a diameter of <math>\varnothing 54</math> and a diameter of <math>\varnothing 22</math> for the handle section. The side view shows a thickness of 8, a mounting height of 56.5, and a length of 135.</p>
<p>3D rendering of the HT3008-EN4L lever handle, showing a sleek, modern design with a circular end and a long, flat handle.</p>	<p>3D rendering of the HS3064-EN4L lever handle, featuring a circular end and a handle with a cylindrical grip section.</p>

SOLID – HS3052-EN4L	HOLLOW – H34B01-EN4L
<p>Technical drawing of the solid lever handle (HS3052-EN4L). Dimensions include a diameter of <math>\text{Ø}54</math>, a length of 138, a mounting plate thickness of 8, a mounting plate height of 60, and a mounting hole diameter of <math>\text{Ø}22</math>.</p>	<p>Technical drawing of the hollow lever handle (H34B01-EN4L). Dimensions include a diameter of <math>\text{Ø}54</math>, a length of 129, a mounting plate thickness of 8, a mounting plate height of 55, and a mounting hole diameter of <math>\text{Ø}23</math>.</p>
<p>Photograph of the solid lever handle (HS3052-EN4L) in a brushed metal finish.</p>	<p>Photograph of the hollow lever handle (H34B01-EN4L) in a brushed metal finish.</p>

SOLID – HS3031-EN4L	SOLID – HS3032-EN4L
 <p>Technical drawing of handle HS3031-EN4L. The side view shows a length of 127. The top view shows a diameter of <math>\varnothing 54</math>. The mounting plate has a thickness of 8 and a mounting hole diameter of <math>\varnothing 24</math>.</p>	 <p>Technical drawing of handle HS3032-EN4L. The side view shows a length of 139. The top view shows a diameter of <math>\varnothing 54</math>. The mounting plate has a thickness of 8 and a mounting hole diameter of <math>\varnothing 21</math>.</p>
 <p>3D rendering of handle HS3031-EN4L.</p>	 <p>3D rendering of handle HS3032-EN4L.</p>

SOLID – H60B01-EN4L	SOLID – HS3023-EN4L
 <p>Technical drawing of handle H60B01-EN4L. The side view shows a circular grip with a diameter of <math>\varnothing 54</math> and a total length of 135. The cross-section view shows a height of 59 and a diameter of <math>\varnothing 22</math>.</p>	 <p>Technical drawing of handle HS3023-EN4L. The side view shows a circular grip with a diameter of <math>\varnothing 54</math> and a total length of 130. The cross-section view shows a height of 66 and a diameter of <math>\varnothing 24.5</math>.</p>
 <p>3D perspective rendering of handle H60B01-EN4L, showing a straight, cylindrical handle with a circular grip.</p>	 <p>3D perspective rendering of handle HS3023-EN4L, showing a curved, tapered handle with a circular grip.</p>



HOLLOW – HT3007-EN4L	SOLID – HT2B01-EN4L

**SOLID – HS3062-EN4L**

